

# SBK/SBP Series

## UNINTERRUPTIBLE POWER SUPPLY

**Power Protection with Communication Port\* for Computers, Servers, Retail / POS Systems, Telecom, LAN and Peripherals**

- ▶ Automatic Voltage Regulator (AVR)
- ▶ Automatic Save and Shutdown Software for Unattended Computers\*
- ▶ USB Communication Port (under 1000VA in USB models)
- ▶ Industry's First 4 Year Pro-Rated Battery Warranty

\*SBP models only



Smart Power Systems provides a complete line of software solutions for standalone and networked computers, including SNMP support.



## Features

- Line interactive design
- Automatic Voltage Regulator
- Automatic Save and Shutdown Software for unattended computer\*
- Fully digitized microprocessor controlled
- Short circuit and overload protection
- DB9 (RS232) and USB port (under 1000VA in USB models)\*
- Tel / Modem / Internet / DSL /Network (RJ11/45) Protection (1000VA and above RJ11 only)
- 50/60 Hz auto sensing
- Low battery indicator (audible)
- Energy saving (during battery mode, no load)
- Hot swappable battery (1000VA and above)
- Cold start (DC power on)
- Two year equipment warranty




Compatible with:




Supports: Win 3.1 / 95 / 98 / ME / XP / 2000 / NT

UPSwing Pro™ for Novell, Linux, SCO Unix, Solaris and Windows with Networking capability is available


SBK/SBP400-800

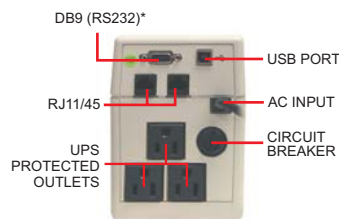

SBP1000-1400

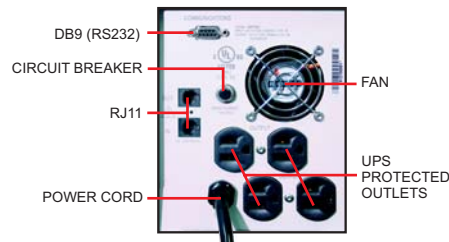

SBP2000

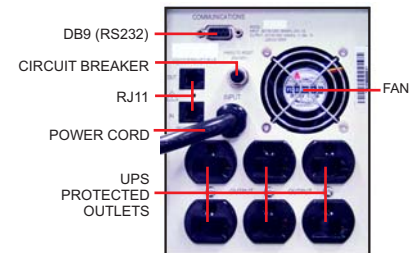

### Specifications for SBK/SBP Series

MODEL	SBK400	SBK500	SBK600	SBK700	SBK800	SBP1000	SBP1400	SBP2000
	SBP400	SBP500	SBP600	SBP700	SBP800			
Output Capacity VA / W	400 / 240	500 / 300	600 / 360	700 / 420	800 / 480	1000 / 600	1400 / 840	2000 / 1080
Output Voltage (on battery)	120V ±10% 50 or 60 Hz ±0.5%							
Interface Port	DB9 (RS232) (SBP models only), USB (USB models)							
Spike Protection	360 Joules							
Back-up Time (Minutes)	10	14	11	12	10	15	13	9
Half Load	10	14	11					
Net Weight (Lbs. / Kg.)	10.7 / 4.8	11.8 / 5.4	12.9 / 5.9	13.7 / 6.22	14.3 / 6.5	30.36 / 13.8	31.24 / 14.2	35.2 / 16
	11 / 5	12.1 / 5.5	13.2 / 6					
Shipping Weight (Lbs. / Kg.)	11.6 / 5.3	12.7 / 5.8	13.8 / 6.3	14.9 / 6.6	15.4 / 7	34 / 15.5	34.9 / 15.8	38.9 / 17.7
	12.1 / 5.5	13.2 / 6	14.3 / 6.5					
Dimensions D x W x H In. (mm)	12.99 x 3.93 x 5.51 (330 x 100 x 140)					14.5 x 5.5 x 7.1 (368 x 139 x 180)		
Receptacles	3-NEMA 5-15R UPS					4-NEMA 5-15R UPS		6-NEMA (5-15R) UPS
Safety	cUL, UL							

220/230/240V models available. Consult factory for specifications and features.

SBP models under 1000VA come with USB port. USB models should have "USB" after the VA, i.e. SBP500USB.

\*SBP models only

Specifications and features subject to change without notice.

### LIMITED PRODUCT WARRANTY

All SBK/SBP units carry a 2 year warranty. Visit our website for details ([www.smartpowersystems.com](http://www.smartpowersystems.com)).

1-800-882-8285

